PARKRAY()



hunterstoves





you're home.

Our Parkray range offers great looking stoves and has something for everyone. From slimline space conscious solutions, to fully effective larger stoves for open plan rooms, we can warm up any space.

8 - 13

14 - 15

16 - 17

18 - 21

22 - 23

24 - 27

28 - 29

30 - 31

32 - 35

36 - 39

40 - 41

42 - 43

44 - 45

46 - 53

54 - 59

THERE IS NOTHING QUITE
AS ROMANTIC AS SITTING IN
FRONT OF A WOOD BURNING
STOVE AND OUR PARKRAY RANGE
OFFERS THE PERFECT SOLUTION
FOR HOMES LARGE OR SMALL.
FEATURING A SELECTION OF
BOTH TRADITIONAL AND
CONTEMPORARY DESIGNS
WE HAVE A STYLE TO
SUIT EVERY SETTING.

Most of the stoves in the Parkray range have been DEFRA approved to ensure they cover Smoke Control Area standards for peace of mind. With easy control and Tripleburn® technology for eco-friendly efficient burning, you will find the Parkray range offers the ideal solution to warm up your home.









10 year warranty

ALL PARKRAY AUTHORISED DEALERS PROVIDE YOU WITH AN EXTENDED 10 YEAR WARRANTY

For full warranty specifications, terms and a list of authorised stockists, please visit www.hunterstoves.co.uk

ASPECT 8 SLIMLINE / WALNUT HANDLE

2

WARRANTY

ASPECT 4 RANGE
ASPECT 5 RANGE

ASPECT 8 RANGE

CONSORT 4 RANGE

CONSORT 5 RANGE

CONSORT 7 RANGE

CONSORT 9 RANGE

CONSORT 15 RANGE

DOUBLE SIDED SINGLE DEPTH

DOUBLE SIDED DOUBLE DEPTH

DERWENT

CHEVIN 5 INSET

CHEVIN 8 INSET

DIMENSIONS

CHEVIN 20B INSET

OPTIONS / FEATURES



THE ASPECT 4 COMPACT IS THE SMALLEST OF THE ASPECT RANGE BUT IT REALLY KICKS OUT SOME HEAT.

With a heat output range of 3-5kW, DEFRA approved and with a very high efficiency, this stove may be small but ensures a beautiful view of the flames through its large viewing window.

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

ON A 12MM HEARTH


MULTIFUEL OPTION

HANDLE OPTIONS: OAK,
WALNUT, BLACK CHROME
AND STAINLESS STEEL

HEAT OUTPUT

3kW T0 5kW

NOMINAL

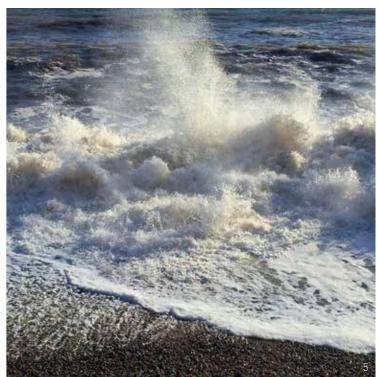

THE ASPECT RANGE FEATURES A LARGE WINDOW SO YOU CAN VIEW THE BEAUTY OF THE FLAMES IN YOUR STOVE.

Combining looks, controllability and a very high efficiency, the Aspect 4 is the perfect addition to any home. This stove is also DEFRA approved and with a heat output of 4.9kW, no air brick is required.

DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

LARGE VIEWING WINDOW

ON A 12MM HEARTH

MULTIFUEL OPTION

HANDLE OPTIONS: OAR


3.5kW T0 5.5kW

NOMINAL

HEAT OUTPUT





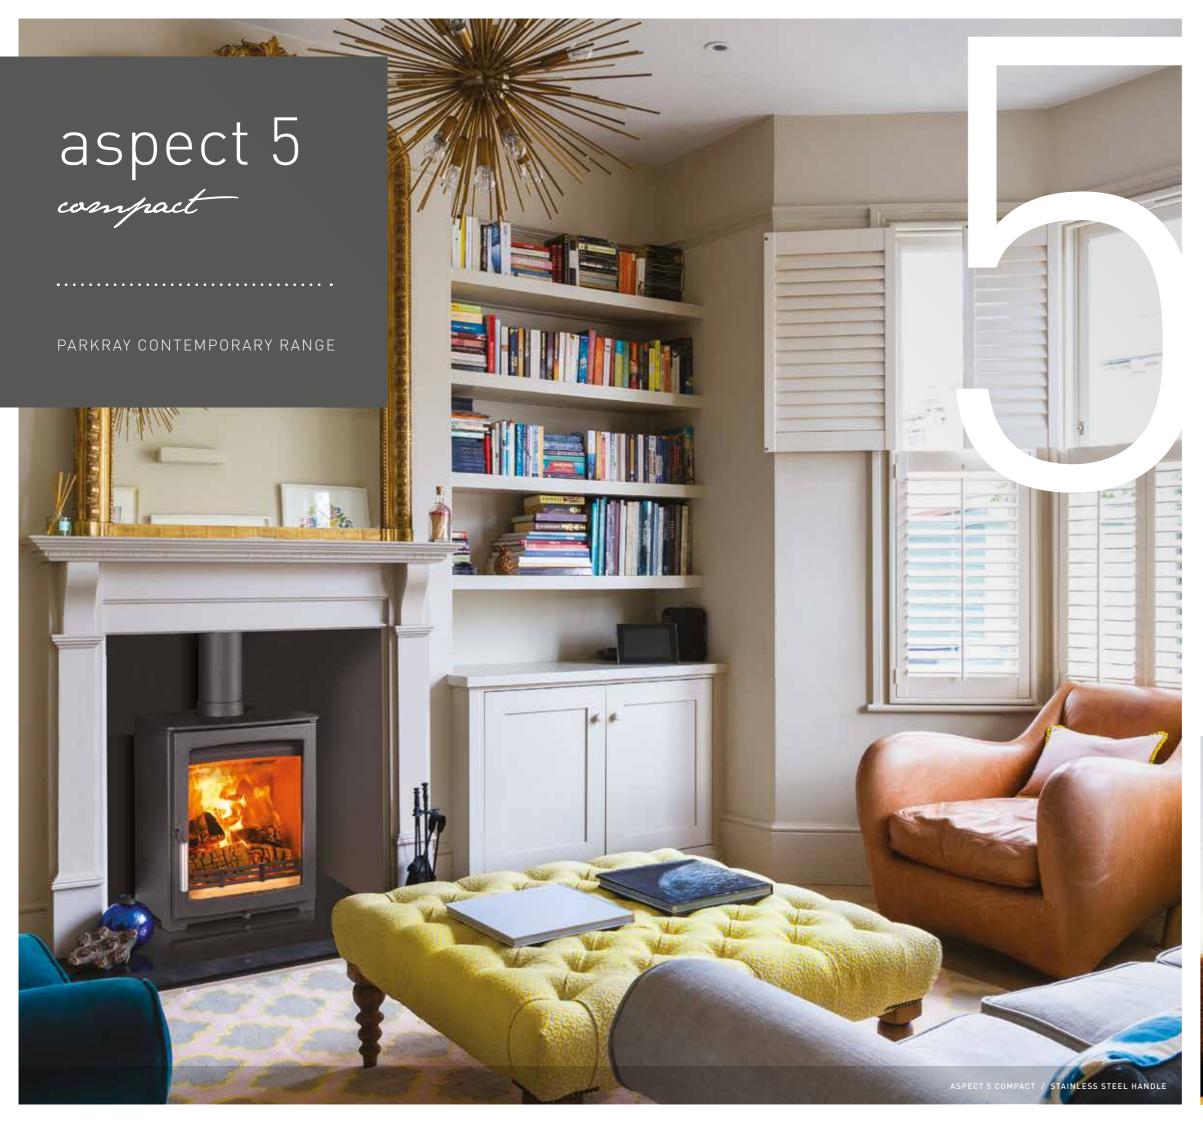

THE ASPECT 5 COMPACT MIGHT BE THE 5'S SMALLER BROTHER BUT IT BURNS AT AN IMPRESSIVE OUTPUT RANGE OF BETWEEN 4 AND 6kW.

As with all of the stoves in the Aspect range, the choice options include four different handles which means this stove can be adapted to suit any interior. The entire range is also DEFRA approved.

DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY

HOT AIRWASH SYSTEM

LARGE VIEWING WINDOW

ON A 12MM HEARTH

MULTIFUEL OPTION


HANDLE OPTIONS: OAK,
WALNUT, BLACK CHRON

HEAT OUTPUT

4kW TO 6kW

NOMINAL



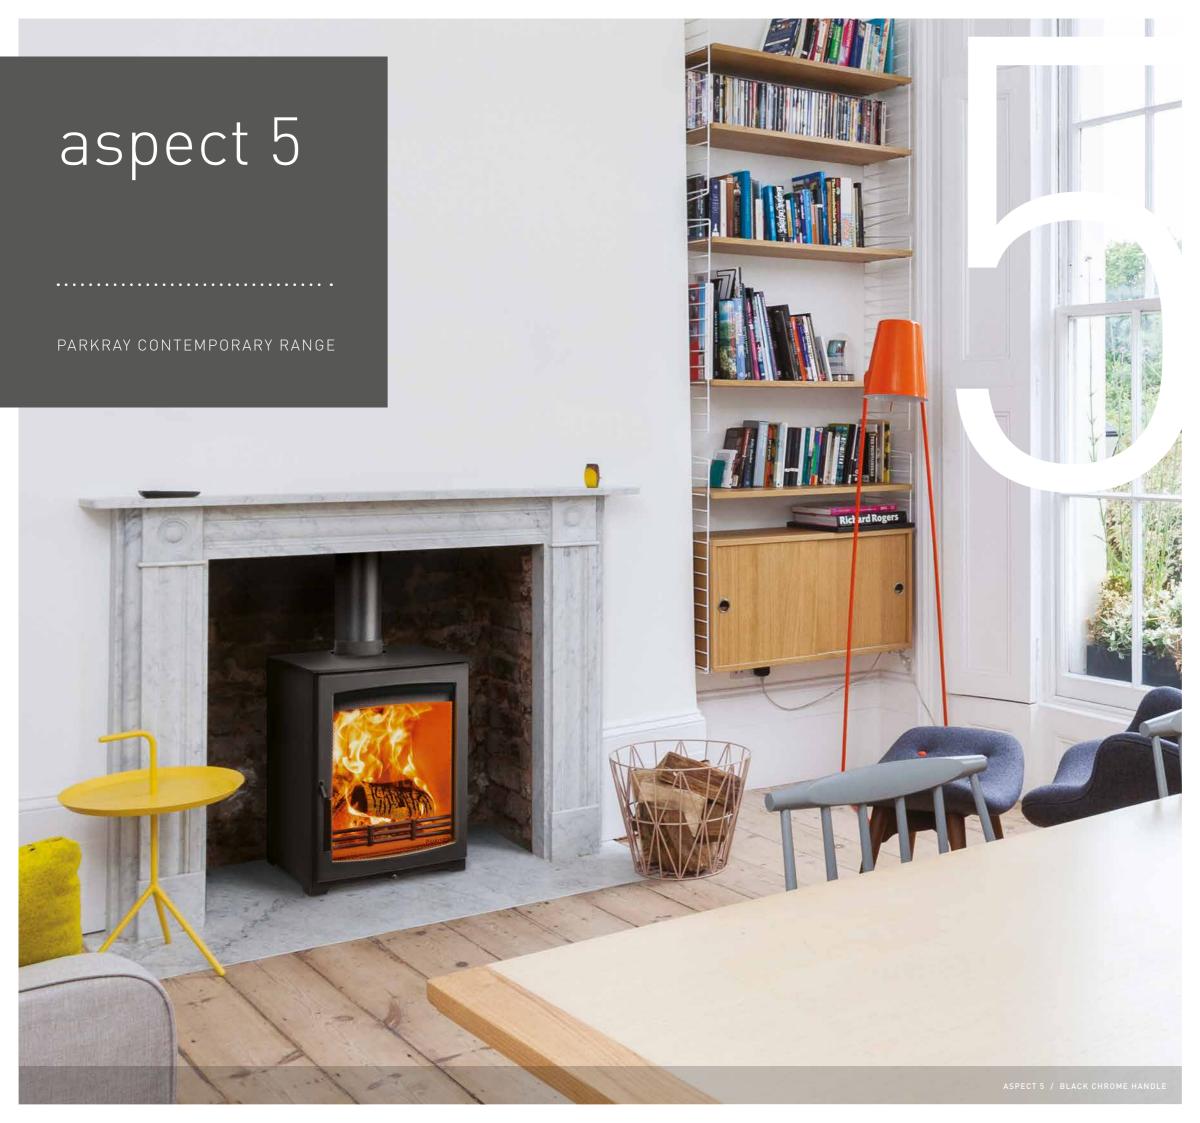

HIGHLY CONTROLLABLE, THE ASPECT 5
CAN CHANGE FROM AN OUTPUT OF 7kW
TO AN OUTPUT OF 4kW IN SECONDS.

Even with the high output, this stove has an impressive CO emission of 0.17% so you can keep warm while being environmentally friendly!

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY
HOT AIRWASH SYSTEM

ON A 12MM HEARTH

MULTIFUEL OPTION


HANDLE OPTIONS: OAK, WALNUT, BLACK CHROME AND STAINLESS STEEL

HEAT OUTPUT

4kW TO 7kW

NOMINAL



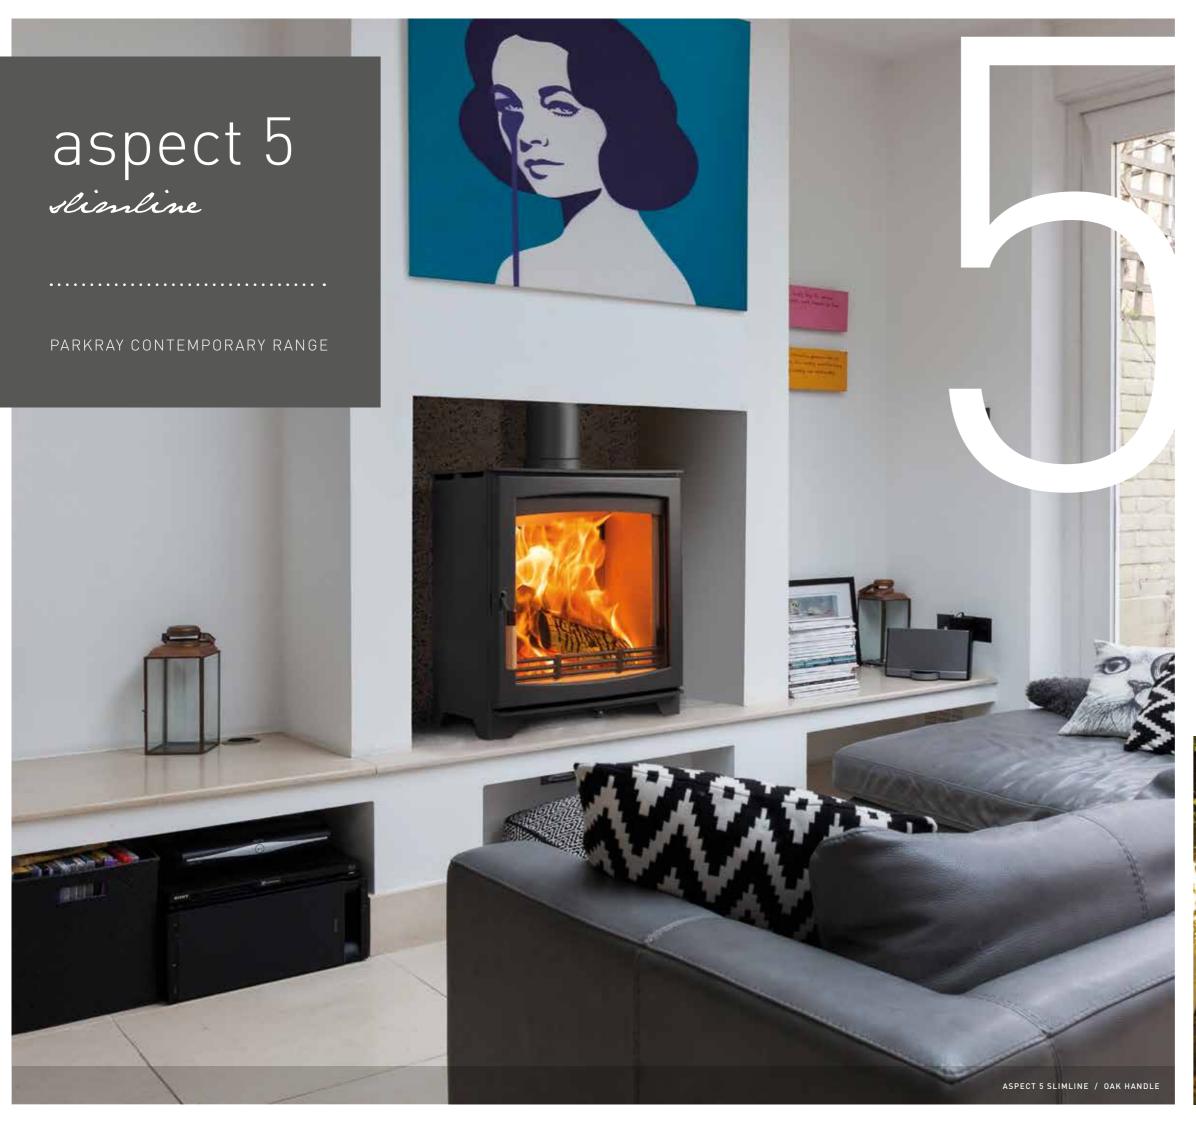

TAKE IN THE FULL VIEW OF YOUR FIRE WITH THE ASPECT 5 SLIMLINE.

The Aspect 5 Slimline packs in all the features of the 5 but in a slimmer box. Highly controllable with our single air control and easily installed with the 5" collar, this stove really offers contemporary elegance.

DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLOGY


HOT AIRWASH SYSTEM

CAN BE FITTED
ON A 12MM HEARTH
CONVECTION STOVE
MULTIFUEL OPTION
HANDLE OPTIONS: OAK,
WALNUT, BLACK CHROME
AND STAINLESS STEEL

HEAT OUTPUT

3.5kW T0 5.5kW

NOMINAL

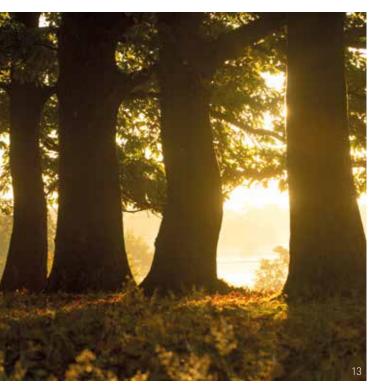



THE BIGGEST STOVE IN THE ASPECT RANGE,
THE ASPECT 8 SLIMLINE PROVIDES
A MAXIMUM VIEW OF YOUR FIRE.

The dominant feature in all of our Aspect stoves is the large glass panel. Although this stove is slim, it is perfect for installations with limited space as the window gives the appearance of a much larger stove.

NO AIR BRICK REQUIRED

5" FLUE COLLAR

TRIPLEBURN® TECHNOLO

ON A 12MM HEARTH

CONVECTION STOVE

MULTIFUEL OPTION

HANDLE OPTIONS: OAK,

HEAT OUTPUT

4kW TO 6kW

NOMINAL





SMALL CAN BE POWERFUL! THE CONSORT 4 IS A SMART, COMPACT STOVE THAT DELIVERS AN IMPRESSIVE HEAT OUTPUT OF UP TO 5.5kW.

For such a small model, this is a remarkable output. Simple to fit (no air brick required) and easy to operate, it's a modern classic. Even though it's less than 40cm wide, the Consort 4 will heat any standard size room. Able to utilise either solid fuel or wood, the Consort 4 will give you hours of warmth and enjoyment.





MULTIFUEL · WOOD FUE

DEFRA APPROVED

NO AIR BRICK REQUIRED

5" FLUE COLLAR

HOT AIRWASH SYSTEN
CAN BE FITTED
ON A 12MM HEARTH
WOOD OPTION


HEAT OUTPUT

3kW T0 5.5kW

NOMINAL

4.7kW



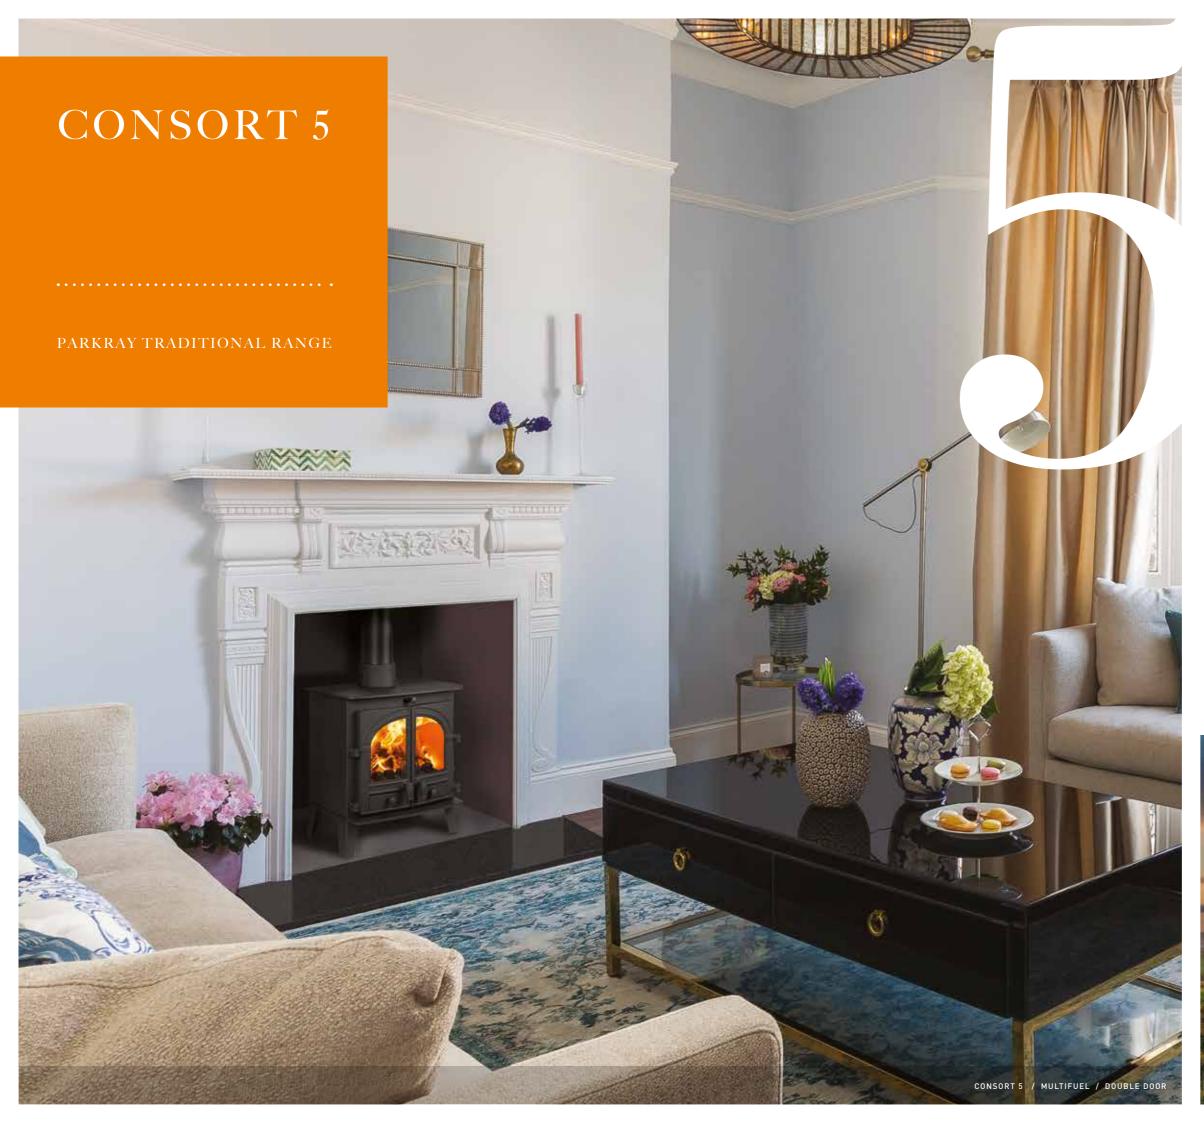

Remarkably efficient with an impressive output.

THIS RANGE PACKS THE BEST FEATURES INTO A COLLECTION OF TRADITIONAL LOOKING STOVES.

All Consort 5 models feature 5" flue collars, Tripleburn® technology and our Hot Airwash System in a size that suits your home.



CONSORT 5





THE CONSORT 5 COMPACT HAS ALL THE EFFICIENT OUTPUT OF THE STANDARD CONSORT 5 JUST IN A SLIGHTLY SMALLER UNIT.

Thanks to its technology, the Compact 5 offers an efficient performance in a small package. Slightly larger than the Consort 4, the Compact 5 is a versatile multifuel burner with a generous output of 3.5 - 5.5kW. It's one of our best performing models with an efficiency of 76%.





MULTIFUEL

EDA ADDDOVED

NO AIR BRICK REQUIRED

TDIDI EDIIDN® TECHNOLO

HOT AIRWASH SYSTEM

CAN BE FITTED

ON A 12MM HEARTH

WOOD OPTION AVAILABLE

HEAT OUTPUT 3.5kW TO 5.5kW

NOMINAL 4.7kW



CONSORT 5

IF YOU ARE LOOKING FOR A LITTLE MORE HEAT FOR A SLIGHTLY BIGGER ROOM, THE CONSORT 5 GIVES A STRIKINGLY IMPRESSIVE OUTPUT.

Independent tests have certified an amazing efficiency of 78%. This not only means a better return for every log you use but also that it is exempt from Smoke Control regulations. With its traditional, homely feel the Consort 5 is, hardly surprisingly, one of our most popular models.





• MULTIFUEL

• W∩

EDA ADDDOVED

O AIR BRICK REQUIRED

RIPI FBURN® TECHNOLOG

HOT AIDWACH CVCTEA

ON A 12MM HEARTH

WOOD OPTION AVAILABLE

HEAT OUTPUT 3.5kW TO 6kW

NOMINAL 4kW



CONSORT 5 SLIMLINE

IF YOU ARE LIMITED FOR SPACE OR WANT TO FIT A STOVE IN AN AWKWARD SPOT, THE CONSORT 5 SLIMLINE COULD BE AN IMAGINATIVE SOLUTION.

It is a slightly wider and slimmer model able to provide all the heat and efficiency that you expect from the Consort range. The Slimline 5 is ideal within shallow contemporary fireplaces. The stove is DEFRA approved for smoke controlled areas.











MULTIFUEL
 SINGLE DOOR

EL DOOR

WOOD FUELDOUBLE DOOR

• WOOD FUEL

DEFRA APPROVED

5" FLUE COLLAR

TRIPLEBURN® TECHI

HOT AIRWASH SYSTEM


ON A 12MM HEART

WOOD OPTION AVAILABLE

HEAT OUTPUT

3.5kW TO 6kW

NOMINAL 4.4kW

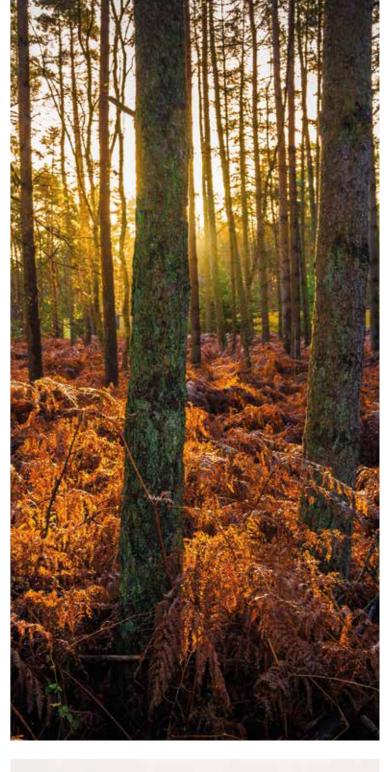





A REAL FIRE CREATES A FABULOUS WARM ATMOSPHERE AND HEATS YOUR WHOLE HOME.

Our modern models are supremely efficient. You can even add a boiler to really put this stove to work. With an output of 7.5kW, the Consort 7 is permitted for use in Smoke Control Areas. Ideal for anyone looking for performance and economy.









- · DOUBLE DOOR · SINGLE DOOR
- · DOUBLE DOOR
 - · SINGLE DOOR

HEAT OUTPUT

4kW T0 7.5kW

NOMINAL

5.4kW

CLIP-IN BOILER 2 RADIATORS



NOMINAL OUTPUT BURNING WOOD

4kW to water

1.5kW to room

NOMINAL OUTPUT BURNING SMOKELESS FUEL

4kW to water

1.5kW to room

MAXIMUM OUTPUT

4kW (13,600BTU) to water 2.5kW to room



A family sized stove with a generous output to match.

A FAMILY SIZED STOVE WITH A
GENEROUS HEAT TO MATCH. THE
CONSORT 9 AND 9 SLIMLINE HAVE AN
IMPRESSIVE OUTPUT SO ARE PERFECT
FOR HEATING LARGER ROOMS.

The Consort 9 is capable of heating your home and your water with the addition of wrap around and clip-in boilers.



CONSORT 9



CONSORT 9

THE CONSORT 9 HAS BEEN DESIGNED FOR EFFICIENT PERFORMANCE IN LARGER FAMILY ROOMS.

Running at an efficiency of 78.9%, the Consort 9 is an economical way to heat larger areas. It has been painstakingly designed to utilise our best-ever technology. With an output of up to 11kW this is a well-equipped stove.











DOUBLE DOOR

· SINGLE DOOR

HEAT OUTPUT 6kW T0 11kW

NOMINAL 9kW

BOILER OPTIONS

ASK OUR EXPERTS ABOUT THE CENTRAL HEATING MODELS AVAILABLE FOR THE CONSORT 9.

WRAP AROUND BOILER 7 RADIATORS



NOMINAL OUTPUT BURNING WOOD

2.2kW to room 6kW to water

NOMINAL OUTPUT BURNING SMOKELESS FUEL

1.7kW to room 6.3kW to water

MAXIMUM OUTPUT

8.5kW (29,000BTU) to water

2.5kW to room

CLIP-IN BOILER 3 RADIATORS

NOMINAL OUTPUT BURNING WOOD

5.5kW to water 2.5kW to room

NOMINAL OUTPUT BURNING SMOKELESS FUEL

5.5kW to water 2.5kW to room

MAXIMUM OUTPUT

5.5kW (18,750BTU) to water 2.5kW to room

CONSORT 9 SLIMLINE

THE SLIMLINE 9 IS DESIGNED SPECIFICALLY TO FIT IN SHALLOW FIREPLACES, BUT WITHOUT COMPROMISING ON STYLE.

The wide fuel bed can be stacked with plenty of fuel for a long, efficient burn. Airflow controls allow you to manage a range of temperatures. The generous output of up to 11kW makes this model ideal for family spaces.













· MULTIFUEL SINGLE DOOR

· WOOD FUEL DOUBLE DOOR

· SINGLE DOOR


HEAT OUTPUT

4.5kW TO 8kW

NOMINAL 4.9kW





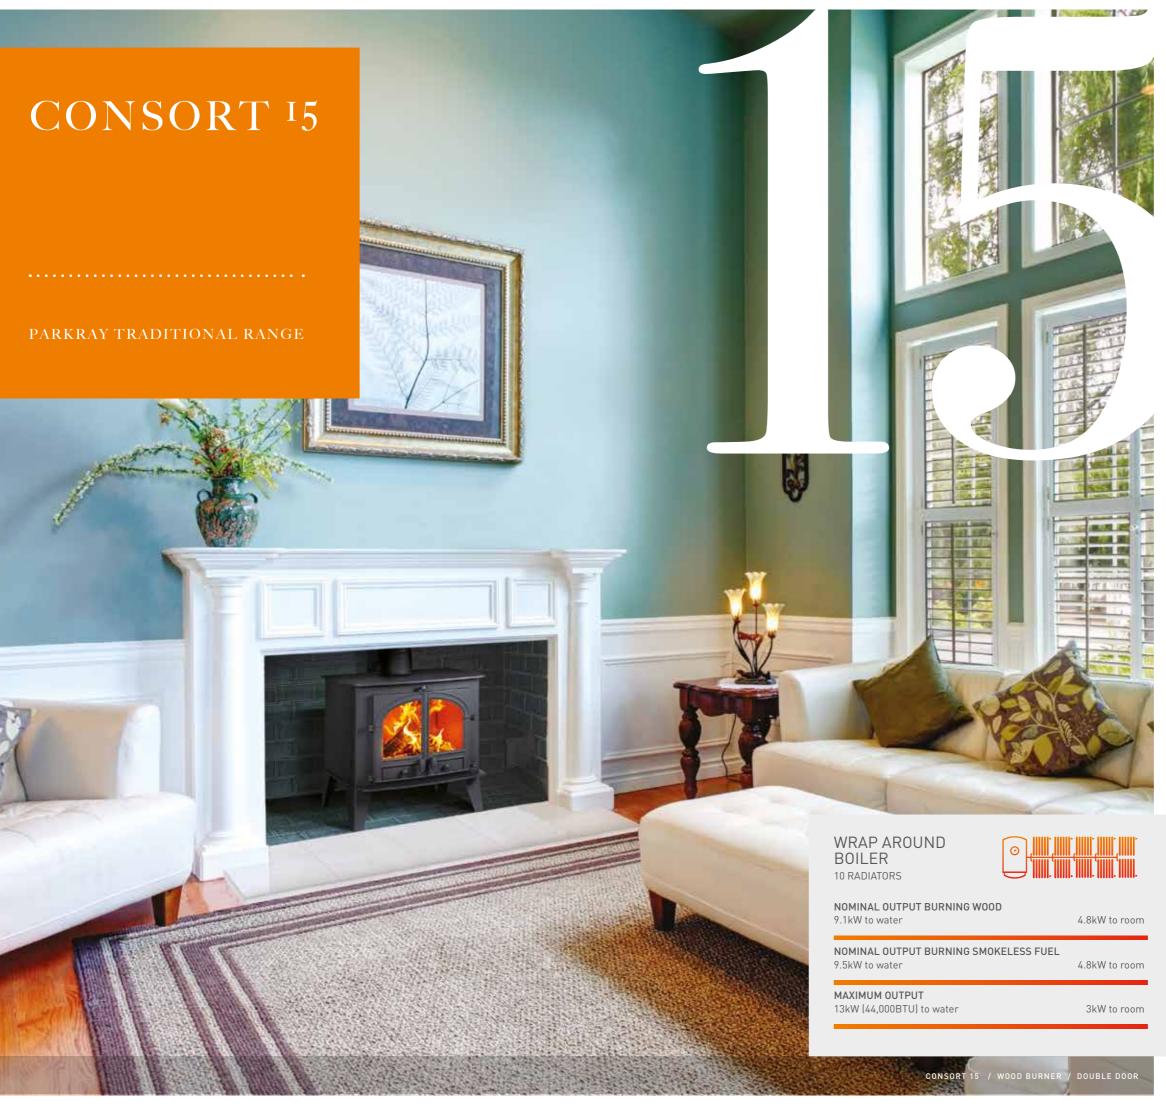

DESPITE ITS ROARING BLAZE, THE CONSORT 15 HAS AN INDEPENDENTLY TESTED EFFICIENCY OF 78.6%.

Three air streams ensure effective ignition and lower emissions - delivering supreme performance in a family-sized package. Customise it with optional extras, or add a boiler and put the Consort 15 to work. The airflow controls are easy to use and offer adjustable heat levels, enabling you to warm up big or open-plan spaces with ease.









HEAT OUTPUT

8kW T0 15kW

NOMINAL

11.9kW

3.5kW to room

NOMINAL OUTPUT BURNING WOOD



5kW to water

NOMINAL OUTPUT BURNING SMOKELESS FUEL

5kW to water

3.5kW to room

MAXIMUM OUTPUT

4.5kW to room 7.7kW (23,950BTU) to water



THE DERWENT IS ONE OF OUR
SMALLEST STOVES, IT HAS A STRIKING
CONTEMPORARY LOOK AND HAS BEEN
DESIGNED TO FIT COMFORTABLY
INTO A LIMITED SPACE.

With such a small footprint it has an impressive output of up to 5kW. It ensures your fuel burns better, for longer. Tripleburn® technology ensures that fuel is effectively ignited and used economically.

DEFRA APPROVED

PROVED TRIPLEBU • TECHNOL

5" FLUE COLLAR

HOT AIRWASH SYSTEM

HEAT OUTPUT

3.5kW T0 5kW

NOMINAL

/ 01-14/





A focal point on both sides, perfect for open-plan living for both traditional and contemporary rooms.

A DOUBLE SIDED STOVE IS A
REVELATION FOR OPEN-PLAN SPACES
AND A SINGLE DEPTH STOVE RADIATES
HEAT MORE EFFECTIVELY THROUGH
YOUR LIVING SPACE.

The Double Sided Single Depth range features our classic Consort stoves; 4, 7, 9 and our largest yet, the Consort 15.



DOUBLE SIDED single depth









CONSORT 4 SINGLE DEPTH

IF YOU ARE LOOKING FOR GREAT ECONOMY A DOUBLE SIDED CONSORT 4 MODEL IS A COMPACT STOVE WHICH RADIATES HEAT MORE EFFECTIVELY THROUGH YOUR LIVING SPACE.

It's easy to install and even easier to use. The internal airwash helps to keep the glass clear and airflow controls on both sides enable you to operate the stove either side.

CONSORT 7 SINGLE DEPTH

THE CONSORT 7 OFFERS A GREAT COMBINATION OF STYLE AND ECONOMY.

Our Double Sided stove is perfect for open fireplaces, where it provides a focal point on both sides. This variation on our renowned Consort 7 stove has a generous output of up to 8kW. This is a great option for an installation in any open-plan space.

CONSORT 9 SINGLE DEPTH

THE CONSORT 9 DOUBLE SIDED STOVE IS THE ULTIMATE WAY TO WARM A LARGE SPACE AND BRING IT TO LIFE.

This option will warm your space quickly and effectively. Thanks to Tripleburn® technology, it reaches 79% efficiency - so it's a wise choice for the budget conscious.

CONSORT 15 SINGLE DEPTH

THE LUXURIOUS CONSORT 15 CREATES A SERIOUSLY HEARTY OUTPUT.

Fuel it up and the Consort 15 Double Sided, Single Depth can be left to smoulder. Equipped with all our finest hot airwash and Tripleburn® technology, with heat outputs ranging from 8kW to 15kW, it can handle big open-plan spaces with ease.





MULTIFUFI

WOOD FUFI

HEAT OUTPUT 4kW TO 6kW

NOMINAL 5.5kW



 DOUBLE DOOR SINGLE DOOR

HEAT OUTPUT

NOMINAL

 WOOD FUFI DOUBLE DOOR

 WOOD FUFI SINGLE DOOR

5kW TO 8kW

6.5kW

MULTIFUEL

SINGLE DOOR

MULTIFUFI

DOUBLE DOOR

WOOD FUFI

· SINGLE DOOR

WOOD FUFI

DOUBLE DOOR

HEAT OUTPUT 6kW T0 11kW

NOMINAL 8.9kW











SINGLE DOOR

 WOOD FUFI DOUBLE DOOR


SINGLE DOOR

35

HEAT OUTPUT 8kW TO 15kW

NOMINAL 11.6kW

34

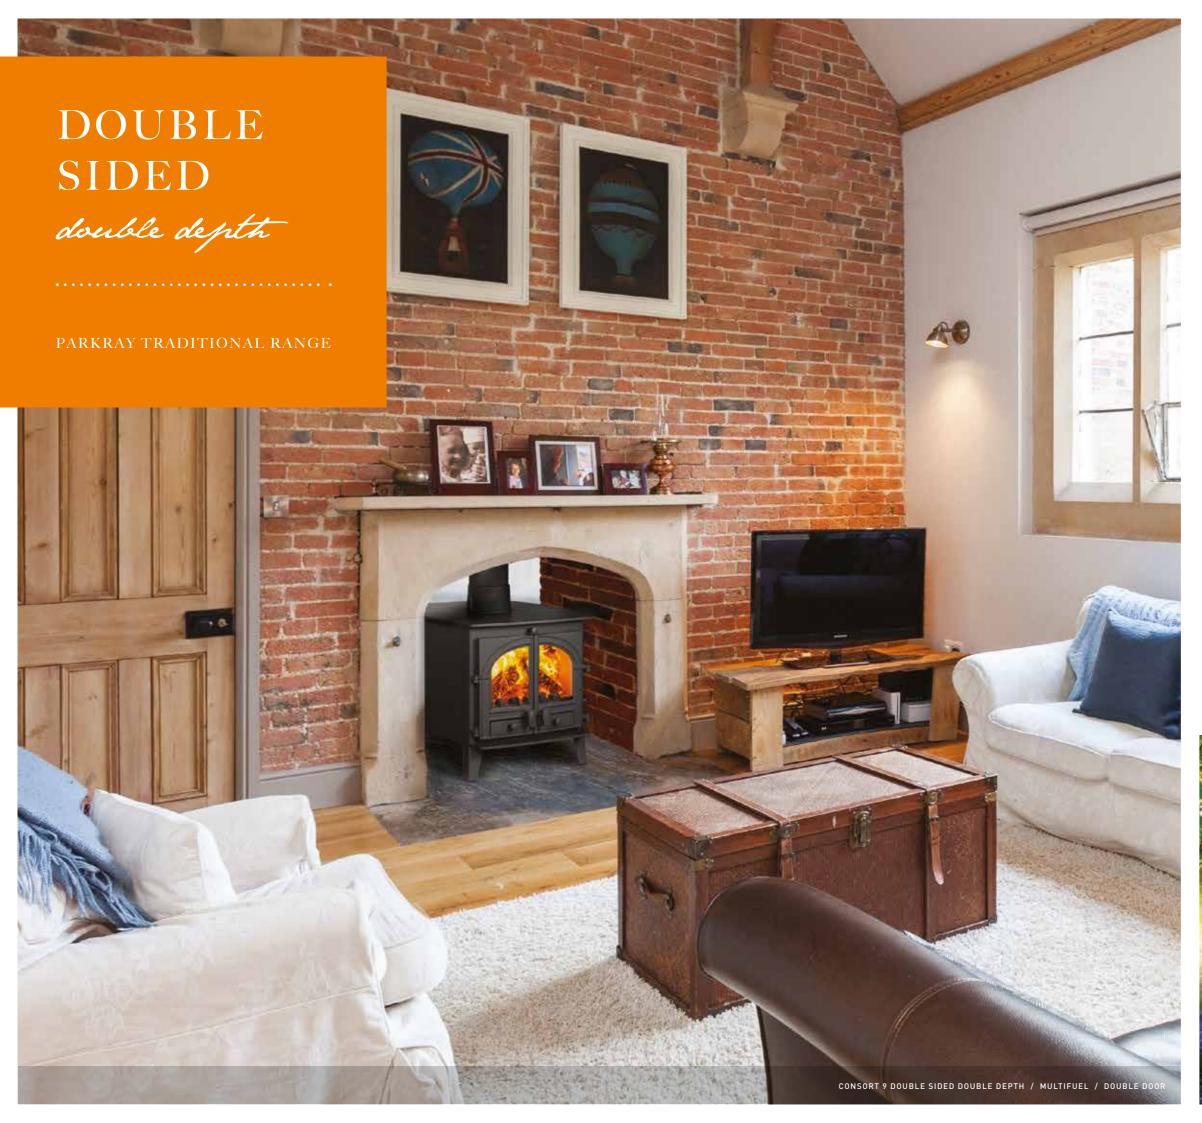

With large windows showing radiant flames on both sides, a Double Sided Double Depth stove will be the main focus of your home.

MAKE A DOUBLE SIDED DOUBLE DEPTH THE HEART OF YOUR HOME AND BRING LARGE SPACES TO LIFE.

These imposing stoves use our Tripleburn® technology and the Double Sided Double Depth Consort 15 can produce up to a staggering 25kW heat output - ideal for those who don't do anything by halves.



DOUBLE SIDED double depth









CONSORT 4 DOUBLE DEPTH

A FAMILY FAVOURITE, THE CONSORT 4 DOUBLE SIDED DOUBLE DEPTH STOVE ECONOMICALLY PROVIDES FOR ALL YOUR HEATING NEEDS AND ITS REFINED LINES MAKE IT A PLEASURE TO LOOK AT.

With an increased output of almost 100% on the double sided single depth model, the Consort 4 is powerful, compact and easy to control with the help of our airflow controls on both sides.





HEAT OUTPUT 6kW T0 11kW

NOMINAL 10.6kW

CONSORT 7 **DOUBLE DEPTH**

A WELL BALANCED STOVE, THE CONSORT 7 DOUBLE SIDED DOUBLE DEPTH MODEL IS BUILT TO HANDLE ALL SORTS OF ROOM SIZES AND HOUSE TYPES WHILE MAINTAINING COMPOSED ELEGANCE.

A heat output of up to 13kW, large viewing window on both sides and our combination of style and economy means the Consort 7 Double Sided Double Depth is perfect for large open fireplaces.







MULTIFUEL

SINGLE DOOR





 WOOD FUFI SINGLE DOOR



HEAT OUTPUT

NOMINAL 10.5kW

CONSORT 9 DOUBLE DEPTH

RADIANT FLAMES ON BOTH SIDES OF THE CONSORT 9 BRING LARGE SPACES TO LIFE, WARMING THEM QUICKLY AND EFFECTIVELY.

The heat output can reach an impressive 18kW while the stove continues to maintain good efficiency thanks to our Tripleburn® technology.

CONSORT 15 DOUBLE DEPTH

THE CONSORT 15 DOUBLE SIDED, DOUBLE DEPTH IS OUR BIGGEST STOVE YET.

Perfect for heating big spaces with ease and packed with our best technology, this is a classic stove on a much grander scale.



MULTIFUEL

DOUBLE DOOR



MULTIFUEL

SINGLE DOOR



WOOD FILE!

DOUBLE DOOR



WOOD FILE!

SINGLE DOOR

8kW T0 18kW









 MULTIFUEL DOUBLE DOOR

 MULTIFUEL SINGLE DOOR

 WOOD FILE! DOUBLE DOOR

 WOOD FILE! SINGLE DOOR

39


HEAT OUTPUT 14kW T0 25kW

NOMINAL 17.8kW

8kW T0 13kW HEAT OUTPUT

> NOMINAL 11.4kW

38

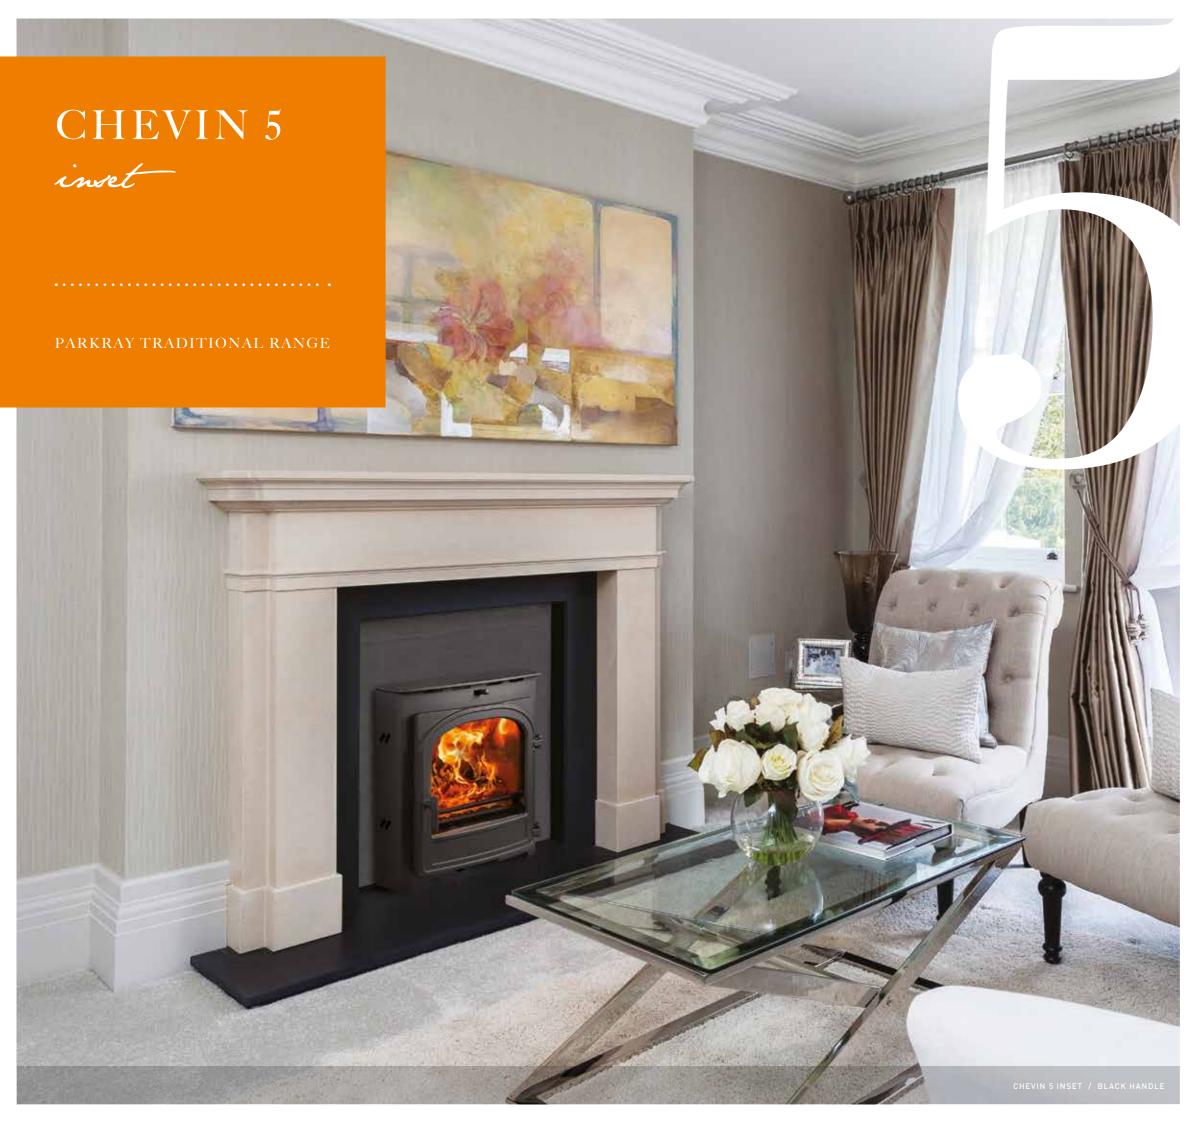

WITH A 4.9kW NOMINAL OUTPUT THE CHEVIN 5 INSET IS EASY TO INSTALL AND NEEDS NO EXTRA VENTILATION.

There is no doubt that this stove is one of our best performers and is an excellent contender to replace a gas fire. The Chevin has been DEFRA approved for Smoke Control Areas.





STAINLESS STEEL HANDLE · BLACK HANDLE

EFRA APPROVED

O AIR BRICK REQUIRED

CONVECTION STOVE

HANDLE OPTION

5" FLUE COLLAR

HEAT OUTPUT

3.5kW T0 5.5kW

NOMINAL





CUTTING-EDGE TECHNOLOGY MEANS THAT THIS MODEL IS OUR MOST EFFICIENT INSET, YET IT DELIVERS AN IMPRESSIVE OUTPUT OF UP TO 8kW.

There is an option of black or stainless steel handles and fuel retainer bars, as with all of the Chevin Inset range.









- STEEL HANDLE
- · SINGLE DOOR · DOUBLE DOOR

 - STEEL HANDLE . SINGLE DOOR

DOUBLE DOOR

HEAT OUTPUT

5kW T0 8kW

NOMINAL

6kW





TO HELP WITH YOUR CENTRAL HEATING AND WATER DEMANDS WE HAVE DEVELOPED AN INSET STOVE THAT INCORPORATES A BOILER.

Instead of a space consuming boiler, a stunning inset fire drives your central heating and what's more comforting than real flames? With an impressive 10.4kW boiler and a cosy 5.1kW to your room it's guaranteed to keep you snug all winter.









- SINGLE DOOR
- STEEL HANDLE . DOUBLE DOOR

- SINGLE DOOR STEEL HANDLE
 - · DOUBLE DOOR

HEAT OUTPUT

5kW TO 6kW

NOMINAL

5.1kW

WRAP AROUND BOILER 10 RADIATORS



NOMINAL OUTPUT BURNING WOOD

10.7kW to water

5.1kW to room

NOMINAL OUTPUT BURNING SMOKELESS FUEL

10.7kW to water

5.1kW to room

MAXIMUM OUTPUT

12kW (41,000BTU) to water

6kW to room

aspect features

	ASPECT 4 COMPACT	ASPECT 4	ASPECT 5 COMPACT	ASPECT 5	ASPECT 5 SLIMLINE	ASPECT 8 SLIMLINE
DEFRA Approved	Y	Y	Y	Y	Y	Y
Nominal Heat Output (kW)	4.9	4.9	4.9	4.9	4.9	4.9
Heat Output Range (kW)	3-5	3.5-5.5	4-6	4-7	3.5-5.5	4-6
Efficiency on wood (%)	85.5	85.9	81.6	79.1	78.9	79.2
CO emission (at 13% 02)	0.48	0.33	0.18	0.17	0.20	0.24
Ventilation (mm2)	NA	NA	NA	NA	NA	NA
Log lengths (mm)	280	280	350	350	330	350
Minimum hearth thickness required (mm)	Freestanding: 12 Recessed: 125					
Weight (kg)	52	56	70	74	85	98
Clearance Distances to combustible materials (mm)*	Rear: 100 Side: 500	Rear: 200 Side: 600	Rear: 200 Side: 550	Rear: 200 Side: 600	Rear: 200 Side: 250	Rear: 200 Side: 300
Clearance Distances to non-combustible materials (mm)	Rear: 50 Side: 50					
non-combustible materiats (IIIII)	Above: 150					

CONTACT YOUR DEALER FOR INSTALLATION ADVICE Y = YES N = NO 0 = OPTION NA = NON APPLICABLE

* Distances when installed with a twin walled flue (with the addition of a heat shield)

PLEASE NOTE: A Direct Air option will be available soon





aspect options

LOG STAND

The Aspect stoves can be fitted on a log stand to raise it up off the floor and have a place to store your wood. They are available in either 150mm or 225mm tall.



STOVE	HEIGHT	DEPTH	WIDTH
ASPECT 4 COMPACT	150 / 225	307	400
ASPECT 4	150 / 225	357	400
ASPECT 5 COMPACT	150 / 225	312	494
ASPECT 5	150 / 225	362	494
ASPECT 5 SLIMLINE	150 / 225	325	550
ASPECT 8 SLIMLINE	150 / 225	328	610

...........

BENCH

The stoves in the Aspect range have the option of being fitted on a bench. There is a choice of two lengths, 800mm and 1,195mm long. Both are at a height of 345mm and a depth of 415mm.



FLUE GATHER BOX

For rear flue installations with limited space.

FLUE DAMPER

This allows a greater controllability on the flue draw (if necessary).

CONSORT / DERWENT features

CONTACT YOUR DEALER FOR INSTALLATION ADVICE Y = YES N = NO 0 = OPTION NA = NON APPLICABLE

	CONSORT 4	CONSORT 5 COMPACT	CONSORT 5	CONSORT 5 SLIMLINE	CONSORT 7	CONSORT 9	CONSORT 9 SLIMLINE	CONSORT 15	DERWENT
DEFRA Approved						NA		NA	
Nominal Heat Output (kW)	4.7			4.4	5.4	9		11.9	4.8
Heat Output Range (kW)	3-5.5	3.5-5.5	3.5-6	3.5-6	4-7.5	6-11	4.5-8	8-15	3.5-5
Efficiency on wood (%)	72.8	76	78	74.1	75.9	78.9	72.4	78.6	76.8
CO emission (at 13% O ₂)	0.27	0.3	0.44	0.32	0.48	0.35	0.25	0.18	0.43
Double door option	NA	NA	NA	S	S	S			NA
Single door option				0	0	0	0	0	
Boiler Option	NA	NA	NA	NA	Clip in	Clip in or wraparound	NA	Clip in or wraparound	NA
Ventilation (mm²)	NA	NA	NA	NA	825	2255	NA	4950	NA
Log lengths (mm)	280	330	280	405	380	500	500	500	400
Minmum hearth thickness required (mm)	Freestanding: 12 Recessed: 125	Recessed: 125	Freestanding: 12 Recessed: 125	Recessed: 125	Recessed: 125				
Weight (kg)	70	99	100	92	101	120	120	145	75
Clearance Distances to combustible materials (mm)	Rear: 650 Side: 400	Rear: 750 Side: 350	Rear: 650 Side: 400	Rear: 650 Side: 400	Rear: 650 Side: 400	Rear: 1100 Side: 700	Rear: 750 Side: 450	Rear: 1100 Side: 650	Rear: 750 Side: 400
Clearance Distances to non-combustible materials (mm)	Rear: 50 Side: 50 Above: 150	Rear: 50 Side: 150 Above: 150	Rear: 50 Side: 50 Above: 150						





CONSORT / DERWENT

options

CANOPY

Select Consort stoves are available with a low or high canopy option. Contact your dealer for more details.

FLUE GATHER BOX

For rear flue installations with limited space.

FRONT EXTENSION

This front extension enables you to place more fuel into your stove.

FLUE DAMPER

This allows a greater controllability on the flue draw (if necessary).

CONSORT DS / DD features

	Consort 4 DS Single Depth	Consort 7 DS Single Depth	Consort 9 DS Single Depth	Consort 15 DS Single Depth	Consort 4 DS Double Depth	Consort 7 DS Double Depth	Consort 9 DS Double Depth	Consort 15 DS Double Depth
DEFRA Approved								
Nominal Heat Output (kW)								
Heat Output Range (kW)								
Efficiency on wood (%)								
CO emission (at 13% $\mathrm{O_2}$)								
Double door option								
Boiler Option								
	225	825				3025	3520	
								500
Minimum hearth thickness required (mm)	Freestanding: 12 Recessed: 125	Recessed: 125	Recessed: 125	Recessed: 125	Recessed: 125	Recessed: 125	Recessed: 125	Recessed: 125
							230	
Clearance Distances to combustible materials (mm)		Side: 900	Side 500			Side: 900		
Clearance Distances to non-combustible materials (mm)								

IT, V		features
	T T 1	

CHEVIN 5 INSET	CHEVIN 8 INSET	CHEVIN 20B INSET	
		N	
3.5-5.5	5-8	5-6	
77.1	75	69.9	
0.28	0.22	0.28	
NA	NA	NA	
		0	
NA	NA		
4.9			
NA	550	550	
235	250	250	
Recessed: 125	Recessed: 125	Recessed: 125	
117	117	128	
Top of fire surround 200 Side of fire surround 150	Top of fire surround 275 Side of fire surround 100	Top of fire surround 275 Side of fire surround 200	

CONSORT DS / DD

DS / DD options

FRONT EXTENSION

This front extension enables you to place more fuel into your stove.

FLUE DAMPER

This allows a greater controllability on the flue draw (if necessary).



HANDLE

The Inset stoves are available with an option of black or stainless steel handles with matching fuel retainer bars.

DIRECT AIR

The Chevin 20B Inset is available with an optional Direct Air kit.

PARKRAY TRIPLEBURN®


technology

CONSORT STOVES INCORPORATE THE PARKRAY TRIPLEBURN® TECHNOLOGY. THIS MEANS THAT THE STOVES ARE MORE ECO-FRIENDLY AND EFFICIENT THAN CONVENTIONAL STOVES, CONTRIBUTING TO A CLEANER ENVIRONMENT.

ASPECT AIRFLOW



PARKRAY AIRFLOW



INSET AIRFLOW

HOT AIRWASH

THE AIRWASH ENSURES THE GLASS IS KEPT CLEAN

The airwash is achieved by air being drawn into the top of the stove and heated in the central air chamber before being directed down behind the glass door, creating a screen between the fire and the glass. Smoke or combustion particles do not come into contact with the glass, leaving it clear.

FAQs

WOODBURNING

OPTIMUM WOODBURNING CONDITIONS

For efficient woodburning the hot 'airwash' is directed down the stove door and into the heart of the fire, this ensures complete combustion which helps to keep the chimney clean. All stoves need a deep bed of ash to build up the optimum conditions for burning wood.

SOLID FUEL

OPTIMUM SOLID FUEL BURNING CONDITIONS

When burning smokeless fuel and for easy lighting of the Consort stoves the grate can be changed to the open position by a single turn of the handle. Air can then be directed under the open grate and into the heart of the fire - the optimum conditions for burning solid fuel. The Aspect range with a static grate is able to burn wood and solid fuel with

a single easy air control at the end.

TRIPLEBURN® **TECHNOLOGY**

The three streams of air cause an incredibly efficient burning of the fuel, this results in an increased heat output, less smoke and a cleaner environment. See diagrams above.

Due to the Parkray Tripleburn® and cleanly.

FROM WOOD TO MULTIFUEL WITH A SINGLE MOVEMENT

The integral grate in the Consort range can be changed from wood setting to multifuel, with the cold-handled riddling tool.

DUST FREE. SAFE AND EASY RIDDLING

By simply moving the riddling tool backwards and forwards, the stove riddles safely with a minimum of effort. This is undertaken with the doors closed and is completely dust free. Only available on the Consort range.

INTERNAL LINING SYSTEM

The internal lining system maximises the firebox temperature, ensuring complete combustion

EXCEPTIONALLY EFFICIENT

technology, all stoves in the Parkray range burn exceptionally efficiently

INTERCHANGEABLE FLUE OUTLETS

CHIMNEY SWEEPING

All the single sided free standing stoves in the Parkray range can be flued from either the top or the rear of the stove.

COLD-HANDLED RIDDLING TOOL

The cold handled riddling tool can be used for opening and closing the doors, riddling the grate, grate adjustment and easy removal of the ash pan. Only available on the Consort range.

HOW MUCH SPACE WILL MY STOVE NEED? WHAT IS A NOMINAL HEAT OUTPUT?

With all our freestanding units it is safe to install with a clearance of 2" (50mm) either side and above the stove to NON Combustible material. However for optimum performance and heat output we recommend clearance of 6" (150mm). Behind the stove there should be a minimum clearance of 2" (50mm) however we recommend 4" (100mm) to enable access to the Tertiary Air inlet.

For all our units the hearth should extend 300mm in front of the appliance (from the door opening).

The nominal output is the output achieved under specific test conditions by the independent test laboratory. The stoves tend to be operated with the air controls set at less than maximum and with relatively modest fuel loads. We recognise that end users are unlikely to operate the stoves in this way and therefore we carry out internal testing to suggest a reasonable Heat Output Range that the customer should achieve without over firing the unit.

EASY ACCESS FOR


The stoves feature a removable throat plate, giving full and easy access for sweeping the chimney*.


THERMOSTAT

An optional thermostat is available on central heating models with wrap around boilers.

53

*Not available for clip in boilers

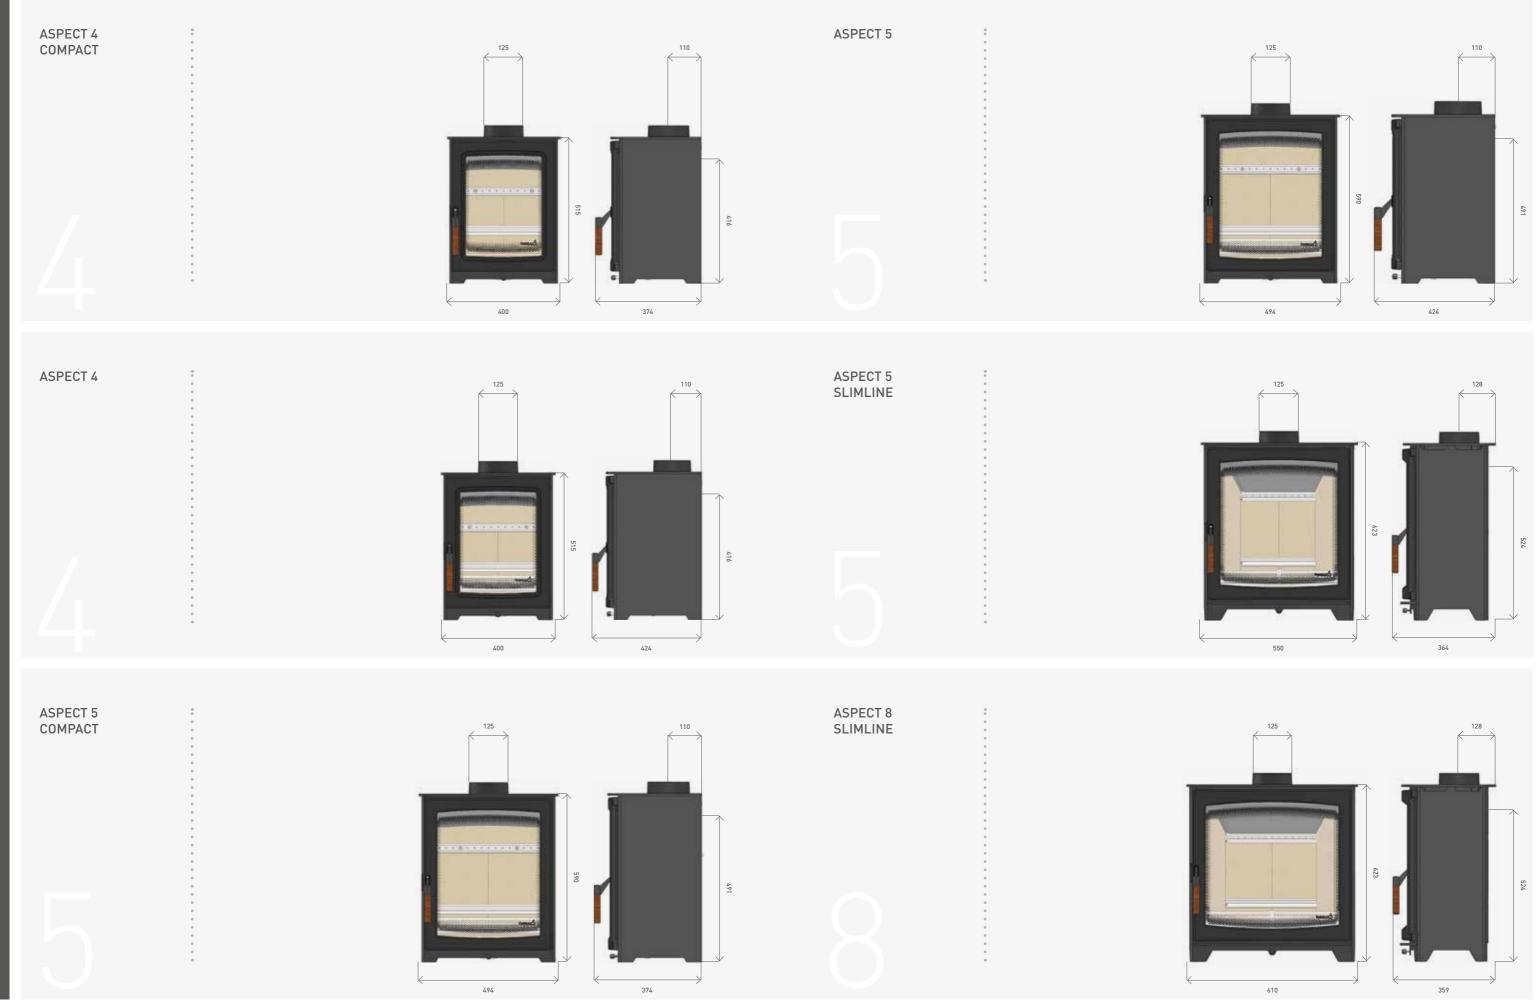

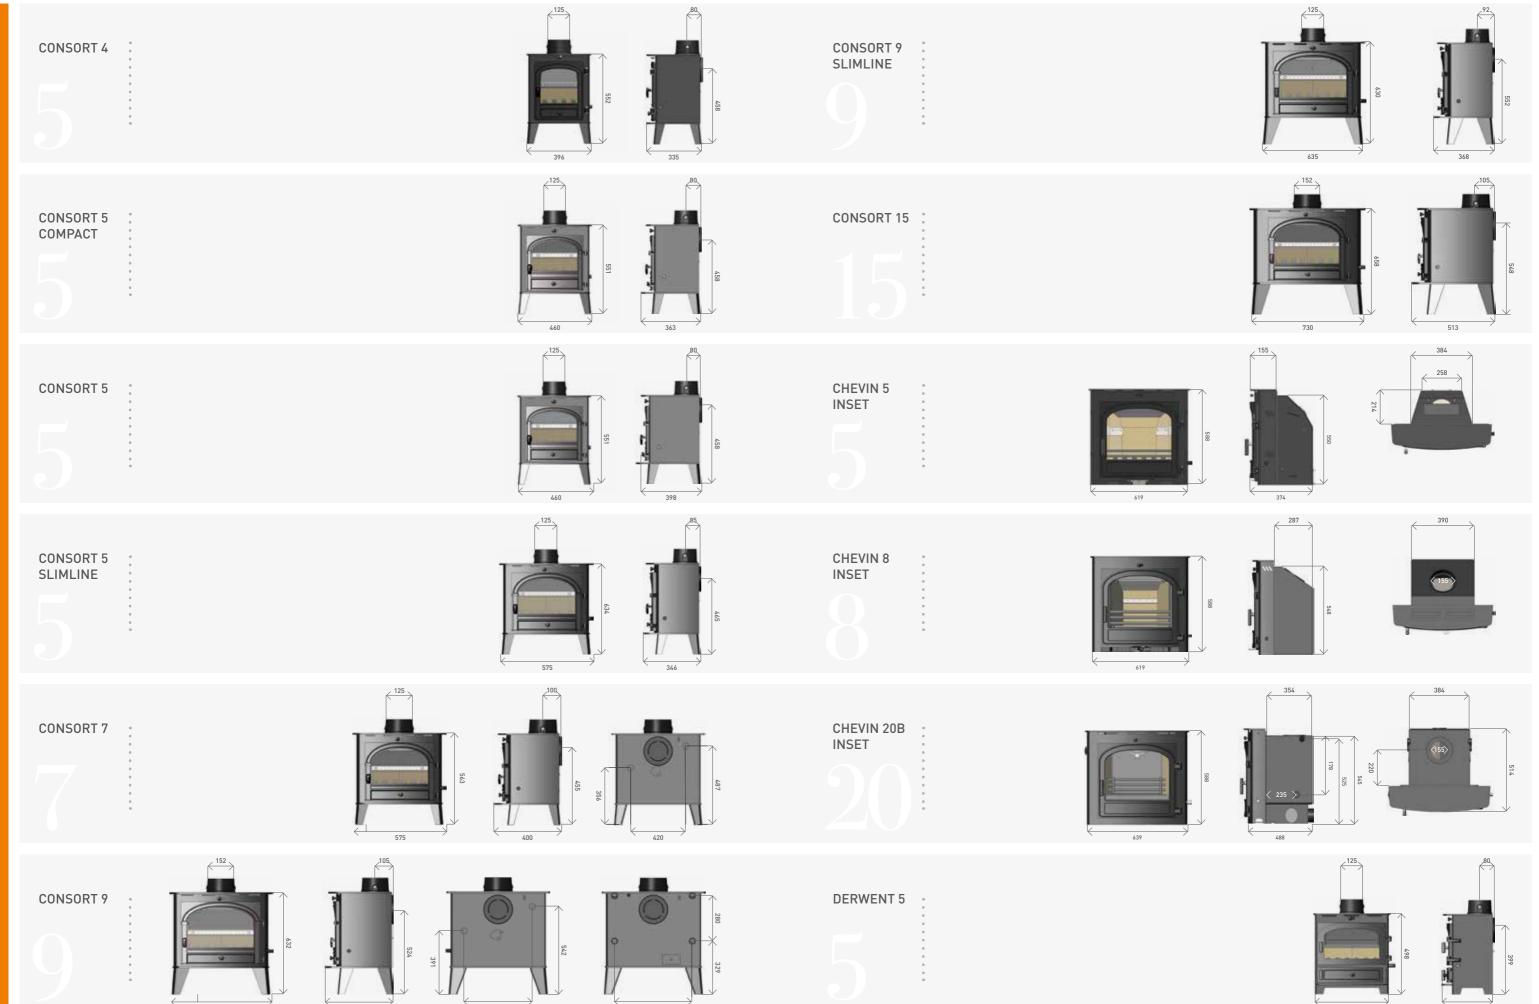





8 EMPEROR WAY EXETER DEVON EX13QS

INFO@HUNTERSTOVES.CO.UK WWW.HUNTERSTOVES.CO.UK









